

B200FLF Blinking Beacon [Filament Lamp]

The B200 series is comprised of a Xenon strobe beacon, permanent filament bulb, blinking filament bulb and a permanent LED array beacon version.

The surface mount base can also be supplied with a right angle bracket or with a pole mounted assembly.

Part codes:

Version:	Wattage:	Part code:
12V dc	5W	B200FLF012B/[x]
24V dc	5W	B200FLF024B/[x]
48V dc	5W	B200FLF048B/[x]
115V ac	5W	B200FLF115B/[x]
230V ac	5W	B200FLF230B/[x]

[x] = Lens colour:

A: Amber
 B: Blue
 C: Clear
 G: Green
 R: Red
 Y: Yellow

Features:


- Bayonet fixing lens.
- Anti-tamper locking screw.
- Stainless steel fixings.



Spare bulb/lamp part codes:

Voltage:	Wattage:	Type:	Part code:
12V dc	5W	BA9s	BR10125B
24V dc	5W	BA9s	BR10245B
48V dc	5W	BA9s	BR10485B
115V ac	5W	BA9s	BR101305B
230V ac	5W	BA9s	BR102305B



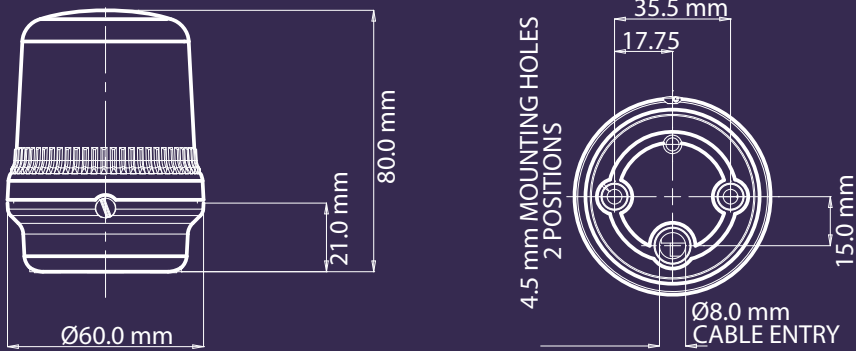

Specification:

Light source:	Filament lamp BA9s
Light output:	5W
Flash frequency:	1Hz
Peak/Effective Intensity cd:	2 cd*
Lens colours:	Amber, Blue, Clear, Green, Red & Yellow
Lens type:	Prismatic (standard) or plain
Mounting:	Surface mount (right angle or pole mount accessories available)
Ingress protection:	IP65
Housing/lens material:	High impact UL94 V0 (f1) PC
Terminals:	0.5 to 1.5mm ²
Operating temperature:	-25 to +50°C
Storage temperature:	-40 to +70°C
Relative humidity:	90% at 20°C.
Weight :	78g

*Candela measurements representative of performance with clear lens at optimum voltage.

Current consumption:

Version:	Current mA:
12V dc	500mA
24V dc	250mA
48V dc	120mA
115V ac 50/60Hz	35mA
230V ac 50/60Hz	25mA

Accessories:

B200RAB001
Wall bracket



B200TMA001
Pole mount assembly
(140mm)

