

# B400SLF Status Beacon [Filament Lamp]

The B400 series comprises Xenon strobe beacons, permanent filament bulb or halogen beacon, blinking filament bulb or halogen beacon, rotating halogen beacon and a multi-function LED array beacon.

The surface mount base can also be supplied with a right angle bracket or with a pole mounted assembly.

## Part codes:

Version:	Wattage:	Part code:
12-250V	40W	B400SLF250B/[x]

[x]= Lens colour:

- A: Amber
- B: Blue
- C: Clear
- G: Green
- R: Red
- Y: Yellow

## Features:

- Bayonet fixing lens.
- Anti-tamper locking screw.
- Stainless steel fixings.
- Multiple cable entries




Note: Filament lamp not included - must be ordered separately.

## Filament bulb/lamp part codes:

Voltage:	Wattage:	Type:	Part code:
12V dc	40W	E14	BG351240E
24V dc	40W	E14	BG352440E
115V ac	40W	E14	B457513040E
230V ac	40W	E14	B457523040E



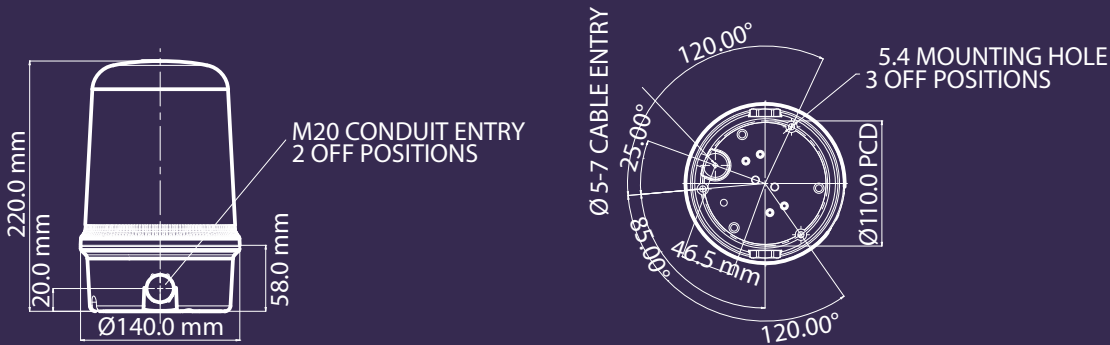

**Specification:**

Light source:	Filament lamp E14
Light output:	40W
Function:	Permanent
Peak/Effective Intensity cd:	27 cd*
Lens colours:	Amber, Blue, Clear, Green, Red & Yellow
Lens type:	Prismatic (standard) or plain
Mounting:	Surface mount (right angle or pole mount accessories available)
Entries:	1 x 5-7mm push through grommet 2 x M20 cable entry
Dimensions:	ø140 x 220mm
Ingress protection:	IP65
Housing/lens material:	High impact UL94 V0 (f1) PC
Terminals:	1.5 mm <sup>2</sup> flying lead assembly
Operating temperature:	-25 to +50°C
Storage temperature:	-40 to +70°C
Relative humidity:	90% at 20°C.
Weight :	535g

\*Candela measurements representative of performance with clear lens at optimum voltage.

**Current consumption:**

Version:	Current mA:
12V dc	3.1A
24V dc	2.05A
115V ac 50/60Hz	321mA
230V ac 50/60Hz	178mA

**Accessories:**

B400RAB001  
Wall bracket



B400TMA001  
Pole mount assembly  
(140mm)

