

A100SONTEL Telephone Initiated Alarm Sounder

The A100SONTEL is a compact, high output, 104dB(A) telephone initiated alarm sounder.

The line powered A100SONTEL has a choice of three alarm tone frequencies.

Features:

- Continuously rated.
- Stainless steel fixings.
- Unit can be mounted using external lugs or internal BESA compatible fixing positions.
- Tropicalisation available on request.

Approvals:

- GOST-R approved. Cert: POCC GB-JB05-B02228

Part codes:

Part code:

A100SONTEL[x]


[x] = Housing colour:

G: Grey R: Red W: White



AL100SONTELFASH
Combination telephone
initiated alarmsounder
and Xenon beacon.

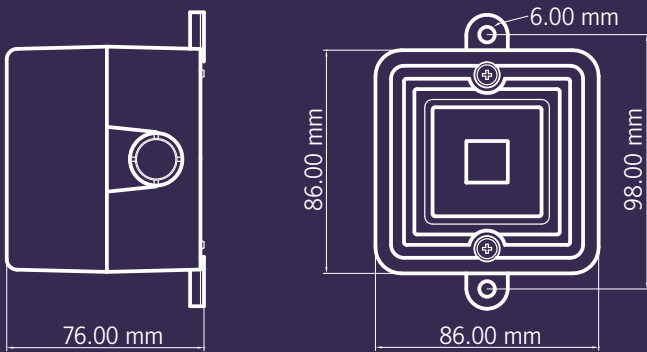

**Specification:**

Nominal output:	100dB(A) @ 1m +/- 3dB
No. of tones:	3
Volume control:	Max. 100dB(A); Min. 90dB(A)
Effective range:	32m @ 1KHz
Supply:	Direct power from telephone line (REN 1)
Ingress protection:	IP56
Housing material:	High impact UL94 V0 & 5VA FR ABS
Colour:	Red (RAL3000), grey (RAL7038) & white.
Cable entries:	3 x M20 clearance gland knockouts in side & back
Terminals:	0.5 to 2.5mm ² cables.
Operating temperature:	-25 to +55°C
Storage temperature:	-40 to +70°C
Relative humidity:	90% at 20°C.
Weight :	0.26kg

Tones:

Tone 1	Siren Tone
Tone 2	Alternating tone
Tone 3	Sweeping tone

*SPL data +/-3dB(A). Measured at optimum voltage.